

AHE Home Elevators







Bristol

With clean lines and timeless style, the Bristol offers flat panel hardwood veneer walls with flat ceiling, matching wood handrail and globe lighting. (Optional custom hardwoods, picture framing and decorative appliqués available).



Flat ceiling with globe light standard. Optional picture framing and other optional lighting available.



Matching wood handrail standard





Shown in clear coat oak with globe light, matching wood handrail and optional wood flooring.

All cabs come standard with unfinished flooring to allow for installation of tile, hardwood or other floorings of your choice.

Optional tray ceiling, shown with 4 recessed down lights, can be added to any cab.



Bright, fresh and airy, the Longport offers white painted interiors with applied picture framing, brushed metal handrail and a matching flat ceiling.



Flat ceiling with globe or 2 recessed lights standard. Picture framing on ceiling and additional recessed lights available.



Shown in standard white lacquer finish with stainless steel handrail, 2 recessed lights, and custom flooring installed by contractor.



Brushed metal handrail standard

Whether you are looking to increase resale value or add accessibility, no other home amenity can compare to the benefits you receive from the installation of a home elevator.



Hvalon

Classic recessed panel designs in both 3 and 4 panel configurations. Offered in standard choices of oak, birch or maple with matching wood handrail. (Optional custom hardwoods, panel inserts and decorative appliqués available).



Flat ceiling with globe or 2 recessed lights standard



3 panel design shown in maple with globe light, matching wood handrail and optional cinnamon stain and wood flooring

Optional glass panels available on all models

> 4 Panel design shown in clear coat oak with matching wood handrail, globe light and optional wood flooring



Matching wood handrail standard



Brandywine

The ultimate in style and craftsmanship. Hand cut hardwood creates exquisite detail in this 4 panel recessed design. The quality and elegance of the coffered ceiling is nothing short of magnificent. Offered in standard choices of oak, birch or maple with matching wood handrail. (Optional custom hardwoods, panel inserts and decorative appliqués available).



Coffered ceiling with 4 recessed lights standard



Detail



Shown in oak with optional chestnut stain and wood flooring





Optional brushed brass handrail (shown). Matching wood handrail standard.

Woods & Finishes

All cabs can be factory finished in a variety of colors to complement your individual style and taste. We use only the highest quality stains and finishes on our cabs. We are committed to producing nothing short of furniture grade wood work. Below is a list of our fine stain offerings shown on maple and oak.



All woods are unique in color, density, and grain. Therefore actual finished wood may differ slightly from the printed samples shown above.

Lighting & Gates

AHE offers both recessed and surface mount lighting to pair with your chosen ceiling design and to properly light your elevator cab. All lighting finishes are coordinated with car operating panel and phone box finish. Please see lighting and ceiling samples below.



Tray





Brass



Stainless Steel Recessed



Picture Frame



Coffered









Vinyl laminate gates come standard in a variety of colors to match your elevator interior. AHE also offers numerous gate options such as hardwood veneers, perforated panels and clear and smoked acrylic inserts. Please visit our web site for more options.










Cherry

www.ahehomeelevators.com

Fixtures

AHE uses only the finest materials for our handrails and fixtures. Whether choosing brushed or polished stainless or brass, you can expect our fixtures to look like new for years to come.

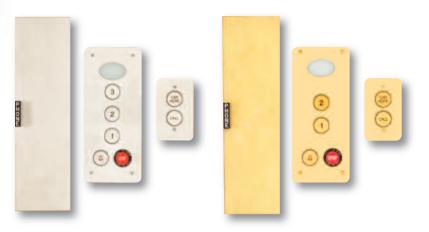

Brushed stainless steel or brushed brass car operating panel and hall stations. Optional polished or oil rubbed finishes available.



Wood handrails available in matching wood stain or lacquered finish.



Brushed Stainless Steel Round



Brushed Brass Round



Polished Stainless Steel Round



Polished Brass Round



Brushed Stainless Steel Flat



Brushed Brass Flat



Polished Stainless Steel Flat



Polished Brass Flat

Specifications

AHE elevators are quiet, durable, and reliable, designed to be the safest in the industry. Specifications are as follows:

SYSTEM DESCRIPTION

- · 950 lb. Capacity Standard
- · 40 ft. per min. car speed
- Up to 6 stops with 50' ft. floor to floor travel
- 9" Minimum pit depth required
- 8'0" clear overhead recommended
 7'8" available with reduced cab height
- . Up to 15 sq. ft. interior cab size standard

EQUIPMENT SPECIFICATIONS

- · Heavy duty cantilever steel sling with smooth ride roller guides
- · 8 lb/ft. Steel tee rail guide system
- 1:2 Roped hydraulic drive system with (2) 3/8" diameter steel hoisting cables
- Two speed hydraulic valve with soft start and stop
- · Submersible pump and motor assembly for quiet, vibration free operation

CONTROL FEATURES

- · Microprocessor based controls with uninterrupted battery backup system
- Electronically matched control and selector systems for smooth, reliable and consistent operation
- · Automatic homing feature parks car at selected floor
- · Automatic car lights with shut off timer
- . In use and car here lights at every floor
- Low oil shutoff and protection

CAB FINISHES & OPTIONS

- Car interiors available in a wide selection of wood species, laminates, and customized panel inserts
- · 84" interior height cabs with individually sized platforms up to 15 square feet
- · Numerous cab opening configurations
- Solid panel accordion gates in many vinyl laminate, hardwood, aluminum, and acrylic insert options
- Automatic gate operators
- Numerous handrails available in matching wood species brushed or polished stainless steel or brass and bronze finish
- Car operating panels and recessed phone boxes available in brushed or polished stainless steel or brass and bronze finishes

Preparatory Work by Others

HOISTWAY

Construct elevator hoistway in accordance with ANSI A17.1 and all local codes. No items not directly involved with the function of the elevator are allowed in hoistway.

Hoistway framework must be plumb and square within ½" over the entire rise. Hoistway doors to be installed plumb, one above the other in accordance with A17.1 Rule 5.3.7.1.2.

Adequate rail bracket support must be provided. Please contact factory or local dealer for specifics.

SINGLE OPENING STANDARD HOISTWAY

PIT


Construct Minimum 9" (12" recommended) pit to receive elevator at lower most landing. Pit dimensions shall be the same as the shaftway dimensions and be so constructed that the pit floor will bear the following loads:

Impact Load @ pit 4750 lbs. Static Load @ pit 2900 lbs.

90 DEGREE OPENING STANDARD HOISTWAY

MACHINE SPACE

Provide adequate, code compliant machine space for elevator equipment adjacent to shaft with below listed electrical connections. Machine space shall be equipped with a light and duplex receptacle.



ELECTRICAL (located in machine space)

- A Dedicated 220 VAC 30 AMP single phase power supply with 3 pole lockable, fused disconnect switch for elevator power, per N.E.C.
- A dedicated 120 VAC 20 AMP single phase power supply with lockable, fused disconnect switch or circuit breaker for car lighting per N.E.C
- 3. Active phone line.

Content subject to change without notice.







127 Route 9 South, Barnegat, NJ 08005 1-800-530-4040 Phone: 609 660-0067 • Fax: 609 660-8004 www.ahehomeelevators.com

YOUR LOCAL DEALER IS